


Movement cal. 2824-2; 2892-2; 2000-1; 2671

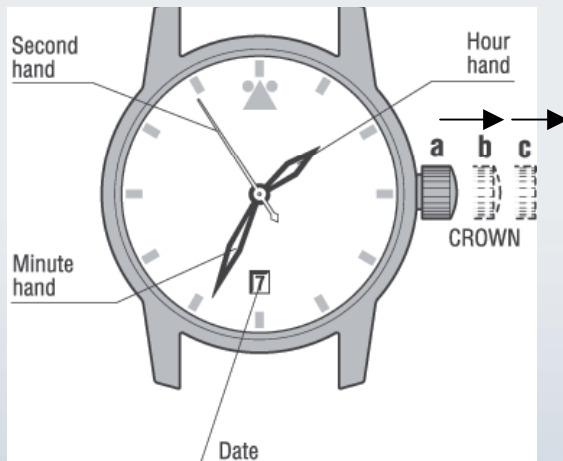

Technical Specifications:

Diameter: 25,6mm, Height 4,6mm, 25 Jewels,
Automatic winding, date, second-stop
2824-2; 2892-2 – date indicator at 6 o'clock; 2000-1;
2671 – date indicator at 3 o'clock.
28.000 vph
Accuracy is about -20 to +40 seconds per day
Shockresistance ETACHRON with fine adjustment,
Power reserve minimum 38 hours
Power reserve after wearing the watch for 10 hours:
minimum 24 hours

Manual

Winding up the watch and setting the time

1. At the beginning it is recommended to wind up the watch with approximately 15-20 rotations. Afterwards the watch will be wound up automatically while you wear it.
2. To set the time please pull out the crown and adjust the time clockwise. After that slightly press the crown back in its initial position.

Position of the crown

- a. Basic position = Wind up the watch
- b. Middle position of the crown = Set the date
- c. Right position of the crown = Set the time

Date Setting

1. Pull out the crown to the middle position.
2. Rotate the crown counterclockwise until you have reached the desired date.
3. Afterwards you can pull out the crown to position C to set the time.

Please take care that you adjust the date in the afternoon, so that the date changes at midnight and not at noon.

WARNING:

STOP rotating the hands at the moment when the time-disc begins to move and the date changes! Wait till the date is changed, then continue adjusting/setting the time/date.

Do not use any force to wind up the watch. The watch is completely wound-up when you feel slight resistance.

If you follow these instructions and use the watch carefully it will work trouble-free and keep high accuracy for a long time.